



2N® Access Commander Box


2N® Access Commander Box is a fully plug and play solution, ideally suited to SMB installations. The software is pre-installed on a mini-pc with ample resources to accommodate up to 2000 devices. You don't need to arrange separate server host hardware or access to an existing server for installation.

Member of the AXIS group



- Plug and play deployment
- No server needed
- Designed for SMB installations

Variant

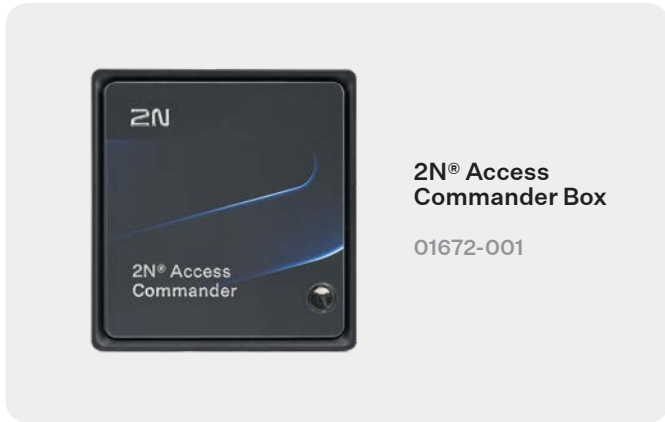

Technical Parameters

General

Introduction The 2N® Access Commander Box is an access control software pre-installed on an ultra-compact, small and powerful computer.

PC specifications

Dimension	2.209 x 4.236 x 4.504 inch (0.69 L)
CPU	2.24 GHz (Intel® Celeron® Processor J3160)
Hard drive	120 GB (2.5" SSD SATA III)
RAM	4 GB (DDR3 SODIMM memory)
Connectors	VGA and HDMI Gigabit LAN port
Mounting	VESA mounting bracket
Operating temperature	32°F to +95°F
Storage temperature	-4°F to +140°F

Limitations

Connected devices	2,000*
Users	100,000*
Users per group	1,500

*Applies only to Access Commander version 2.0 or higher

PC specifications

Optimized for	Google Chrome browser (version 60 and higher)
Other supported browsers	Mozilla Firefox (version 55 or higher), Microsoft Edge (version 40 and higher)

Warranty

5-years warranty see https://www.2n.com/en_GB/support/warranty-and-repairs