



2N® Indoor Talk

The design of the 2N® Indoor Talk answering unit will suit every flat or home. The aesthetic appearance of this product was achieved by using a glass surface and striking backlighting of its icons. However, we placed particular emphasis on selecting the highest-quality audio components in order to achieve a high-quality sound. This means you can talk to visitors outside as if they were standing right next to you. Invite them in and press the icon to open the door from the comfort of your home.



Villas
Residential complexes

Condominiums
Luxury residences

Luxury design and materials

The 2N® Indoor Talk is not only practical, it's also an aesthetic addition to your home. Made from glass and other high-quality materials, its thin body protrudes from the wall by just 10 mm.

Modification to your requirements

Set the required intensity of icon backlighting, choose your favourite ringtone from the 10 available options, or enjoy some peace and quiet by setting the unit to "Do not disturb" mode.

HD quality sound with high volume

The 2N® Indoor Talk uses a HD audio codec and innovative speaker output design, which allows it to achieve a high volume and excellent audio clarity.

2N® Indoor Talk

FEATURES & BENEFITS

Precision installation box

The special flush installation box enables you to gently rotate the unit in order to achieve a perfectly horizontal position after the answering unit has been fitted.

Concierge call

Use the 2N® Indoor Talk to make calls to not only a 2N IP intercom, but to other corresponding answering units in your home, or to reception in your apartment building.

Simple upgrade to a video communicator

The 2N® Indoor Talk can be replaced with a 2N video answering unit without the need for any modification of the existing installation. Both products use the same power supply and installation box.

Doorbell button support

You can easily connect the doorbell at the entrance to your flat or home directly to the 2N® Indoor Talk unit.


Parental lock

It's easy to prevent your children from accidentally letting strangers into your home when playing. Simply press and hold the buttons to activate a parental lock.

“Do not disturb” mode

Activate the “Do not disturb” mode to switch off the ringtone at once or at pre-set time intervals. Use this option when you need absolute peace and quiet.

DIAGRAM

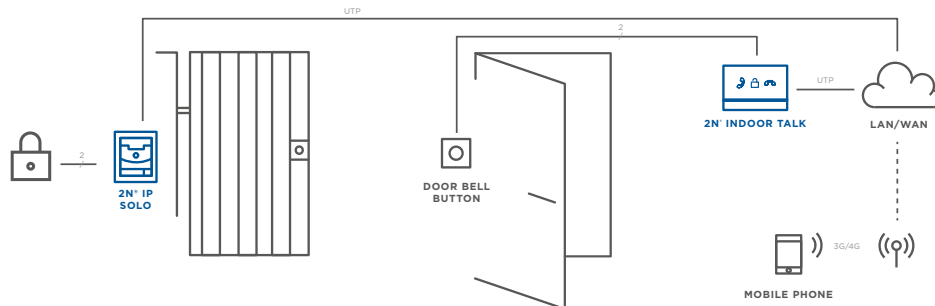

TECHNICAL PARAMETERS

Power supply

Type	12VDC +/-10% adapter or PoE 802.3af
Recommended power supply	12 V / 1 A
Reverse polarity protection	yes

User interface

Controls	7 capacitive buttons with RGB LED backlighting
Operation	Press and hold the RESET button to restore factory settings, 3 LED status indicators

Audio

Microphone	integrated
Speaker	integrated, 2W
Induction loop output	600 mV RMS
Codecs	G.711, G.729, G.722, L16/16kHz

Interface

LAN	10/100BaseT, RJ-45
Recommended cabling	Cat5e or higher

Doorbell Input

Input type	switching contact (button/relay)
Contact type	normally open (NO)
Contact parameters	up to 50V/5mA, DC

Mechanical properties

Dimensions (W x H x D)	185 x 128 x 48.2 mm
Weight	387 g
Operating temperature	0 to 50 °C
Relative operating humidity	10 to 90 % (non-condensing)
Storage temperature	-20 to 70 °C
Recommended altitude	0 to 2000 m

HARDWARE & SOFTWARE

2N® IP Verso - modular security intercom for discerning customers

2N® IP Solo - compact IP intercom ideal for Home Automation

2N® IP Force - the toughest IP Intercom in the world

2N® IP Vario - a variable intercom with an elegant design

2N® IP Base - stylish IP Intercom with high-quality audio and video

2N® Mobile Video - mobile application providing video calls from the intercom to your mobile device

Warranty

5-years warranty see https://www.2n.com/en_GB/support/warranty-and-repairs