



## Monitor Any Lift 24 Hours a Day

The 2N® Lift8 Camera module is a recording device that, after connection to any IP camera, can obtain an image from a lift or monitored space. At set intervals these are stored on a memory microSD card in the camera module. This solution will enable you constantly to monitor a lift cabin or, for instance, a building entrance, enhancing security of such spaces against vandal attacks.

One great benefit of the 2N® Lift8 Camera module is that even if the camera is destroyed, the visual recording of the vandalism is stored on a microSD card in the camera module. It can be located in a safe place (e.g. on top of the lift cabin) so the attacker does not have access to it. Using the recording you can very easily ascertain what actually happened and who caused any damage. Recording data in a loop, which in practice means storing images on the memory card at set intervals, is a matter of course. Once the loop is full, the data is subsequently recorded over, starting from the earliest recording.

### Why choose the 2N® Lift8 Camera module:

- 24/7 lift monitoring
- Increase in lift security
- Protection from vandalism
- May be connected to any IP camera
- Loop data recording
- Fast and simple installation

### Intended for:

- Systems integrator
- Companies installing lifts
- Companies servicing lift equipment
- Call centres for lifts



#### Use:

- Office buildings
- Residential buildings
- Shopping centres



## Example of connection:

If you need to install a camera in a lift cabin for security reasons, you can simply connect it to the 2N® Lift8 Camera module recording device for offline recording. Visual data obtained by the camera is then stored on a memory card in the camera module, to which an attacker does not have access. This will allow you to identify the perpetrator of any intentional damage to the lift cabin.

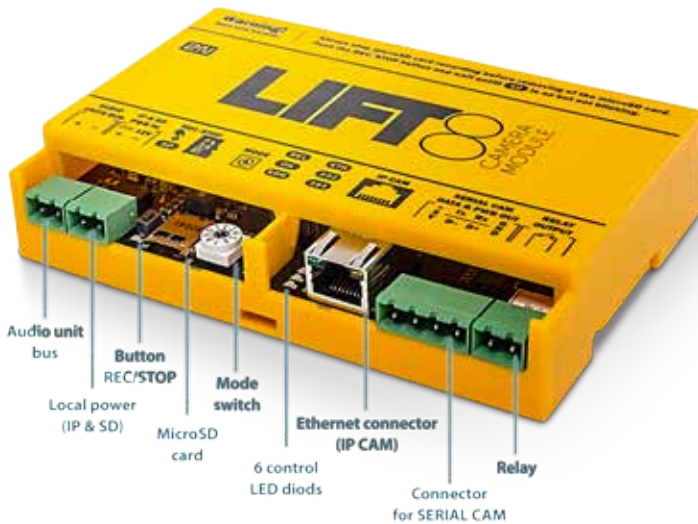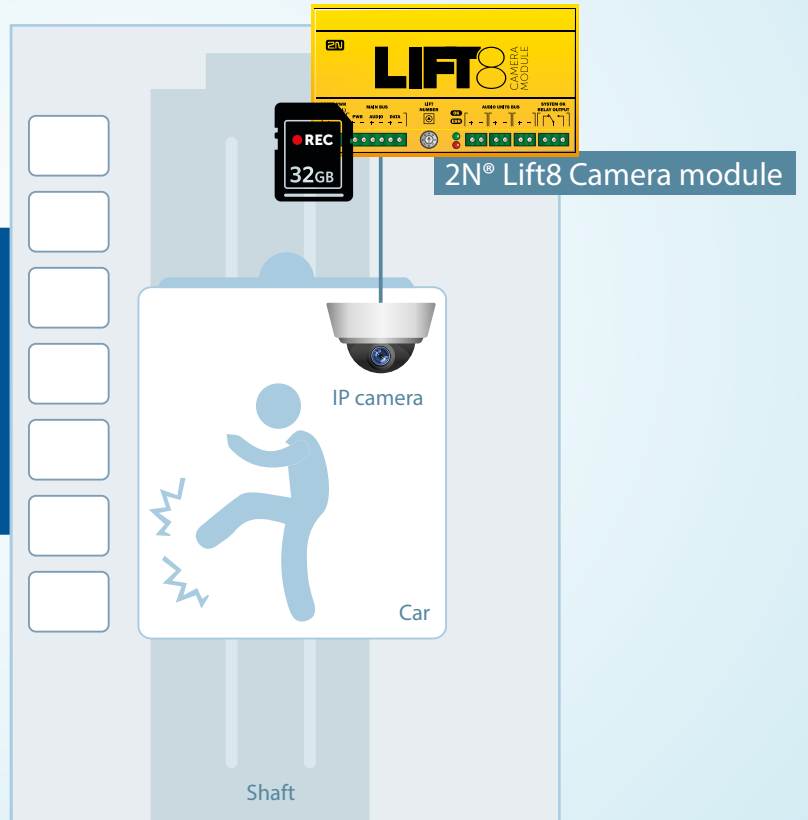

## Technical Parameters

### Power (not included)

From external source 12 - 18V DC, max. 0.2 A

### Mechanical parameters

Dimensions (W x H x D) 142 x 98 x 34 mm  
 Weight 180g  
 IP coverage IP20  
 Operating temperature -40°C to 55°C

### Necessary accessories

Any IP camera

### Interface

Memory card RS232/RS485 and RJ-45  
 microSD - up to 32Gb

Warranty 5-years warranty see  
[https://www.2n.com/en\\_GB/support/warranty-and-repairs](https://www.2n.com/en_GB/support/warranty-and-repairs)



An Axis company

**2N TELEKOMUNIKACE a.s.**

Modřanská 621, 143 01 Prague 4, Czech Republic, Tel.: +420 261 301 500, E-mail: sales@2n.cz, [www.2n.cz](http://www.2n.cz).